

GP15000E

GP SERIES
Commercial/Residential
Portable Generators

A/C Rated Output Watts 15,000
A/C Maximum Output Watts 22,500

Model 5734-0

UPC Number: 696471057348
Emissions Certification: Not for sale in California or Canada.



features

- GENERAC OHVI OVERHEAD VALVE INDUSTRIAL ENGINE WITH FULL PRESSURE LUBRICATION AND SPIN-ON FILTER
- HIGH PERFORMANCE ALTERNATOR
- RESIN FUEL TANK WITH FUEL GAUGE
- FIXED HANDLES
- 12.3" PNEUMATIC WHEELS
- 1.25" HARDENED STEEL TUBE CRADLE
- CIRCUIT BREAKER PROTECTED OUTLETS
- LOW TONE MUFFLER

customer connections

Outlets


A	2x5-20R GFCI
B	2x5-20R
C	2xL5-30R
D	1xL14-30R
E	12VDC Battery Charger Output
F	1x14-50R

Circuit Breakers

M	(1) 20A
N	(1) 20A GFCI
O	(4) 30A

Other Features

H	Hour Meter with Maintenance Reset
I	Idle Control

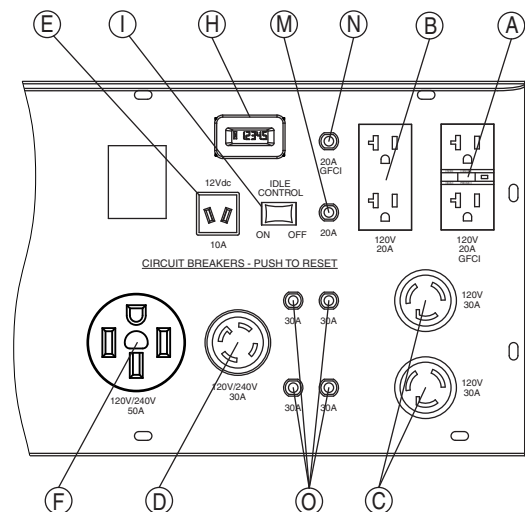

GP15000E

specifications

Product Series	GP15000E
Model	5734-0
Configuration/Emissions	49-State
A/C Rated Output Watts:	15000
A/C Maximum Output Watts:	22500
A/C Voltage	120/240VAC
A/C Frequency	60 Hz
Rated 120/240 VAC Amperage	62.5
Max 120/240 VAC Amperage	93.8
Engine Displacement	992cc
Engine Type	OHVI
Engine RPM	3600
Recommended Oil	5W30
Lubrication Method	Full Pressure
Choke Type	Manual Lever
Fuel Shut Off	Manual Lever
Idle Control	No Load Low Speed
Starting Method	Electric
Battery	Included
Battery Size	12VDC 365 CCA
Low Oil Shutdown Method	Low Pressure

Start Switch Type	3-Position
Switch Location	On Engine
Single-Point Lifting Eye	Included
Fuel Gauge	Built-In
Fuel Tank Capacity (Gal)	16
Fuel Tank Capacity (Liters)	60.56
Run Time at 50% (Hours)	10
Cord Set	No
Handle Style	Fixed
Wheel type	12.3" Pneumatic Wheels
Maintenance Kit	Sold Separately
Warranty - Residential	2 Year
Warranty - Commercial	1 Year

dimensions and weights

Length (L)	48.50
Width (W)	30.75
Height (H)	38.50
Extended Length (EL)	n/a
Carton Length	49.25
Carton Width	23.25
Carton Height	31.00
Unit Weight (lbs)	363
Shipping Weight (lbs)	373

