

## iX1600

iX SERIES  
Commercial/Residential  
Portable Generators

A/C Rated Output Watts: 1600  
A/C Maximum Output Watts: 1650

Model 5792-2

UPC Number: 696471057928  
Emissions Certification: 49/cETL




### features


- INVERTER TECHNOLOGY CREATES QUIET, CLEAN POWER
- LIGHTWEIGHT, COMPACT DESIGN
- VARIABLE ENGINE SPEED ADJUSTS TO MEET DEMAND
- FLEXPPOWER™ MODE SAVES FUEL AND REDUCES NOISE
- ELECTRONIC OVERLOAD PROTECTION
- LOW-OIL SHUT DOWN ENGINE PROTECTION
- 12V DC OUTLET WITH CHARGING CABLE
- DURABLE, FULLY ENCLOSED CASE REDUCES SOUND OUTPUT
- LED STATUS INDICATOR LIGHTS

### customer connections

#### Connection Outlets


A  2x5-15R

#### Circuit Breakers

M  Internal Circuit Breakers

#### Other Features

H  Flex Power

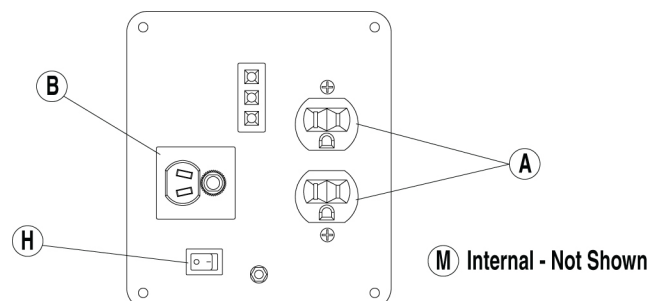

# iX1600

## specifications

Product Series	iX1600
Model	5792-2
Configuration/Emissions	49/cETL
A/C Rated Output Watts:	1600
A/C Maximum Output Watts:	1650
A/C Voltage	120VAC
A/C Frequency	60 Hz
Rated 120/240 VAC Amperage	13.3
Max 120/240 VAC Amperage	13.75
Engine Displacement	99cc
Engine Type	OHV
Engine RPM	Variable
Recommended Oil	SAE 30
Lubrication Method	Splash Sump
Choke Type	Manual Lever
Fuel Shut Off	Manual Lever
Idle Control	FlexPower
Starting Method	Manual
Battery	N/A
Battery Size	N/A
Low Oil Shutdown Method	Low Level

Start Switch Type	On/Off Toggle
Switch Location	Side of Unit
Single-Point Lifting Eye	N/A
Fuel Gauge	N/A
Fuel Tank Capacity (Gal)	0.80
Fuel Tank Capacity (Ltrs)	3.04
Run Time at 50% (Hours)	4.90
Cord Set	N/A
Handle Style	Fixed
Wheel type	N/A
Maintenance Kit	Sold Separately
Warranty - Residential	2 Year
Warranty - Commercial	6 Months

## dimensions and weights

Length (L)	21.0
Width (W)	11.0
Height (H)	18.0
Extended Length (EL)	21.0
Carton Length	23.5
Carton Width	11.0
Carton Height	20.0
Unit Weight (lbs)	43.5
Shipping Weight (lbs)	54.0

